

PRODUCT

INFORMATION



PRATT & LAMBERT PAINTS

SUPRIME®

Exterior Alkyd Wood Primer

S1008 / D1008

DESCRIPTION:

SUPRIME Exterior Alkyd Wood Primer is a high quality alkyd primer formulated to promote superior performance from house and trim paints on wood surfaces. SUPRIME Exterior Alkyd Wood Primer offers outstanding adhesion to wood, excellent tannin stain blocking, sealing and hiding, mildew resistance and creates a tight moisture barrier.

USES:

Use SUPRIME Exterior Alkyd Wood Primer for priming new or previously painted exterior wood surfaces such as siding, shakes, shingles, fencing, window frames, railings and trim. Also an excellent primer for sealing composition board and hardboard siding.

SIZES: Gallons, Quarts

COLORS:

White - For best finished appearance, tint to approximate color of finish coat. Use approximately 1/4 of topcoat formula, not to exceed 2 ounces of colorant per gallon.

RECOMMENDED SYSTEMS:

NEW WORK:

WOOD

1 coat of SUPRIME Exterior Alkyd Wood Primer
1 or 2 coats of P&L Exterior Latex or Alkyd finish

PLYWOOD

Use SUPRIME Exterior Latex Primer for plywood surfaces

COMPOSITION BOARD, HARDBOARD

1 coat of SUPRIME Exterior Alkyd Wood Primer to entire surface, including sides
1 or 2 coats P&L Exterior Latex or Alkyd finish

REPAINT:

Spot prime bare areas with SUPRIME Exterior Alkyd Wood Primer
1 or 2 coats P&L Exterior Latex or Alkyd finish

PRODUCT DETAIL:

| | |
|--------------------|---|
| Vehicle: | Alkyd |
| Sheen: | Eggshell (10-20 @ 60°) |
| % Solids: | By Weight: 79% By Volume: 62% |
| Wt./Gallon: | 11.9 lbs. |
| Viscosity: | 90-96 Ku |
| Flashpoint: | 101°F |
| VOC Level: | Max 350 g/l (2.91 lbs./gal.) |
| Thinner*: | Mineral Spirits |
| Cleanup: | Mineral Spirits |
| Dry Time: | @ 77°F (25°C) 50% RH: To Touch: 3.0 Hours To Recoat: 24.0 Hours |

Rec. Film

| | |
|-------------------|----------------------------------|
| Thickness: | Dry: 2.5 Mills Wet: 4.0 Mills |
|-------------------|----------------------------------|

Coverage: 400 sq. ft./gallon

APPLICATION:

| | |
|---------------------|---|
| Brush: | Natural bristle |
| Roller: | 3/8" nap lambswool cover |
| Pad: | Standard |
| Conv. Spray: | Thin with up to 1 pint mineral spirits* |

Airless Spray: At package consistency

Limitations: DO NOT apply when air, surface or product temperature is below 50°F (10°C) or if temperatures might drop to this level within 4 hours after application.

*** Do not reduce in municipalities, counties, states or provinces where solvent addition will cause VOC limits to be exceeded. Follow all manufacturer's guidelines when working with solvents.**

SURFACE PREPARATION:

WARNING! Removal of old paint by sanding, scraping or other means may generate dust or fumes that contain lead. Exposure to lead dust or fumes may cause brain damage or other adverse health effects, especially in children or pregnant women. Controlling exposure to lead or other hazardous substances requires the use of proper protective equipment, such as a properly fitted respirator (NIOSH approved) and proper containment and cleanup. For more information, call the National Lead Information Center at 1-800-424-LEAD (in US) or contact your local health authority.

General

Remove all surface contamination by washing with appropriate cleaner, rinse thoroughly and allow to dry. Scrape and sand peeled or checked paint to a sound surface. Sand glossy surfaces dull.

Wood

Sand any exposed wood to a fresh surface. Patch all holes and imperfections with a wood filler or putty and sand smooth.

Caulking


Fill gaps between windows, doors, trim, and other through-wall openings with latex or siliconized latex caulk after priming the surface.

Mildew

Remove before painting by washing with a solution of 1 part liquid bleach and 3 parts water. Apply the solution and scrub the mildewed area. Allow the solution to remain on the surface for 10 minutes. Rinse thoroughly with water and allow the surface to dry before painting. Wear protective eyewear, waterproof gloves, and protective clothing. Quickly wash off any of the mixture that comes in contact with your skin. **DO NOT ADD DETERGENTS OR AMMONIA TO THE BLEACH/WATER SOLUTION.**

CLEANUP INFORMATION:

Clean spills and splatters immediately with mineral spirits. Clean tools immediately after use with mineral spirits. Follow manufacturer's safety recommendations when using all solvents.

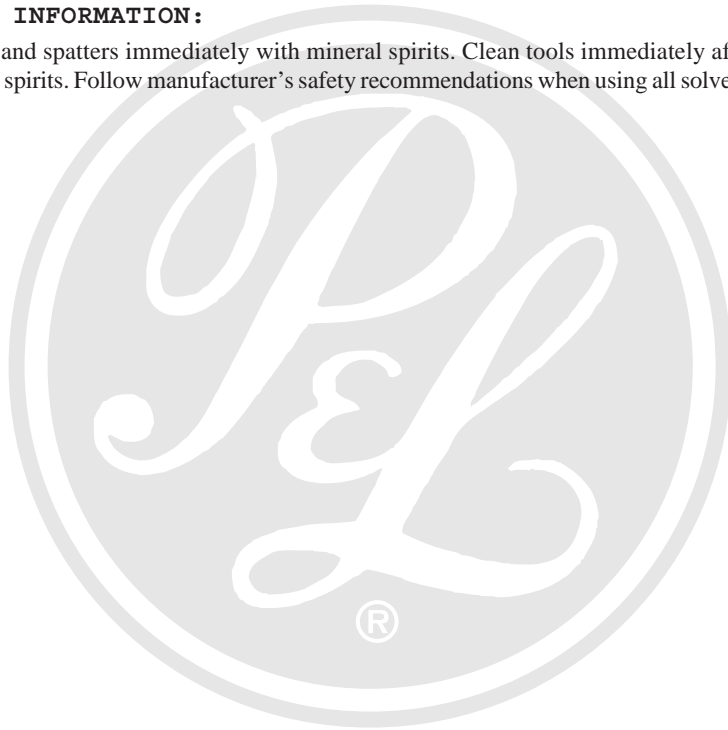

PRATT & LAMBERT PAINTS

APPLICATION:

Do not apply at air or surface temperatures below 50°F or when air or surface temperatures may drop below 50°F within 48 hours. DO NOT paint when precipitation is imminent or very late in the day when dew is likely.

Brush

Use a natural bristle brush.

Roller

Use a 3/8" nap lambswool roller cover.

Spray-Airless

Pressure 2000 psi

Tip015 - .019

Spray-Conventional

Thin with up to 1 pint of mineral spirits

Air Pressure 40-60 psi

Fluid Pressure 10-20 psi

Cap/Tip 704/FX

TIPS TO IMPROVE

PERFORMANCE:

- Clean the surface thoroughly.
- Prepare the substrate to create a uniform surface.
- Patch cracks, crevices, and through-wall openings using proper sealant or patch.
- Fill voids and openings around windows and doors using proper sealant or patch.
- Caulk as needed using quality latex or siliconized latex caulk or sealant.

CAUTIONS:

For exterior use only.
Not for use on horizontal surfaces (floors, roofs, decks, etc.) or where water will collect.

The information and recommendations set forth in this Product Data Sheet are based upon tests conducted by or on behalf of Pratt & Lambert Paints. Such information and recommendations set forth herein are subject to change and pertain to the product offered at the time of publication. Consult your Pratt & Lambert dealer or representative to obtain the most recent Product Data Sheet.