

PRODUCT

INFORMATION



PRATT & LAMBERT PAINTS

Okene Danish Antique Oil Finish

H14 / H14C

DESCRIPTION:

A clear, penetrating interior oil finish designed to enhance and preserve the natural beauty of wood. Produces an attractive antique effect rivaling that of a hand rubbed finish. Seals the pores, resists dirt and penetrating stains.

USES:

Recommended for interior cabinets, trim, paneling and furniture.

SIZES: Gallons, Quarts

COLORS: Clear

RECOMMENDED SYSTEM:

NEW WORK:

Apply with brush, cloth rag, roller or steel wool pad. After 5-10 minutes remove surplus by wiping with a clean rag, burlap or mechanical buffer.

PRODUCT DETAIL:

Vehicle:	Oil
Sheen:	Dull
% Solids:	By Weight: 47% By Volume: 42%
Wt./Gallon:	7.0 lbs.
Flashpoint:	103°F
VOC Level:	Max 450 g/l (3.75 lbs./gal.)
Thinner*:	Mineral Spirits
Cleanup:	Mineral Spirits
Dry Time:	@ 77°F (25°C) 50% RH: To Touch: 4.0 Hours Recoat: 24.0 Hours Use: 24.0 Hours
Rec. Film Thickness:	Dry: Nominal Wet: Nominal
Coverage:	500 sq. ft. (soft woods) 750 sq. ft. (hard woods)

APPLICATION:

Brush:	Natural Bristle
Roller:	3/8" nap sheepskin cover
Pad:	Wool
Conv. Spray:	Not recommended
Airless Spray:	Not recommended

Limitations: NOT recommended for outdoor use. DO NOT color with Glycol (Water) type colorants. NOT RECOMMENDED FOR FLOORS.

Notes: May be tinted with Tonetic Oil Wood Stain (Factory blended colors only).

*** Do not reduce in municipalities, counties, states or provinces where solvent addition will cause VOC limits to be exceeded. Follow all manufacturer's guidelines when working with solvents.**

Technical Information Line:
1-800-BUY-PRAT (1-800-289-7728)
www.prattandlambert.com

SURFACE PREPARATION:

WARNING! Removal of old finishes by sanding, scraping or other means may generate dust or fumes that contain lead. Exposure to lead dust or fumes may cause brain damage or other adverse health effects, especially in children or pregnant women. Controlling exposure to lead or other hazardous substances requires the use of proper protective equipment, such as a properly fitted respirator (NIOSH approved) and proper containment and cleanup. For more information, call the National Lead Information Center at 1-800-424-LEAD (in US) or contact your local health authority.

Wood

NEW WORK:

Sand new wood smooth with finish sand paper. Remove dust with Tack Rag or lint-free rags dampened with water.

Patch all holes and imperfections with a wood filler or putty and sand smooth. Remove any sanding dust with a vacuum or tack cloth. Stain wood to match surrounding areas or pieces using Interior Acrylic Latex Stain. Allow to dry thoroughly, a minimum of 2 hours.

REPAINT


Strip previously finished surfaces in poor condition to bare wood with sandpaper or paint & varnish remover. Sand any exposed wood to a fresh surface.

Mildew

Remove before finishing by washing with a solution of 1 part liquid bleach and 3 parts water. Apply the solution and scrub the mildewed area. Allow the solution to remain on the surface for 10 minutes. Rinse thoroughly with water and allow the surface to dry before painting. Wear protective eyewear, waterproof gloves, and protective clothing. Quickly wash off any of the mixture that comes in contact with your skin. **DO NOT ADD DETERGENTS OR AMMONIA TO THE BLEACH/WATER SOLUTION.**

CLEANUP INFORMATION:

Clean spills and splatters immediately with mineral spirits. Clean tools immediately after use with mineral spirits. Follow manufacturer's safety recommendations when using all solvents.

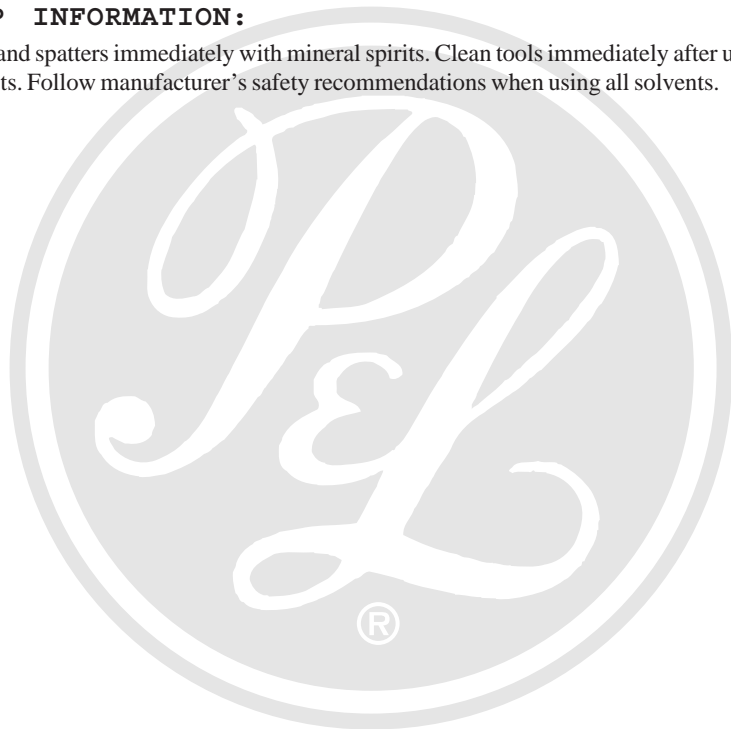

PRATT & LAMBERT PAINTS

APPLICATION:

Apply at temperatures above 50°F.
Do not reduce.

Brush

Use a natural bristle brush.

Roller

Use a 3/8" nap sheepskin cover

Rag/Steel Wool Pad

Apply at package consistency in an even, circular motion, covering all surfaces and minimizing overlap into previously-finished areas. Allow to dry 5-10 minutes and remove excess by wiping with a clean rag, burlap or mechanical buffer.

TIPS TO IMPROVE

PERFORMANCE:

- Clean the surface thoroughly.
- Prepare the substrate to create a uniform surface. Sand with the grain, not against it.
- Patch cracks, crevices, and holes using "stainable" putty or filler.

CAUTIONS:

For interior use only.
Protect from freezing.
Do not shake excessively.
Not for use on horizontal wear surfaces (floors, decks, etc.) or where water will collect.

The information and recommendations set forth in this Product Data Sheet are based upon tests conducted by or on behalf of Pratt & Lambert Paints. Such information and recommendations set forth herein are subject to change and pertain to the product offered at the time of publication. Consult your Pratt & Lambert dealer or representative to obtain the most recent Product Data Sheet.